


THIS PRINT CONTAINS INFORMATION WHICH IS THE PROPERTY OF Muncie Power Products. IT HAS BEEN FURNISHED ONLY FOR INSTRUCTION OR PARTS IDENTIFICATION. IT IS NOT TO BE USED FOR MANUFACTURING OR PROCUREMENT PURPOSES FROM OTHER THAN PROPRIETOR.

DO NOT SCALE
WORK TO DIMENSIONS
REPORT ERRORS

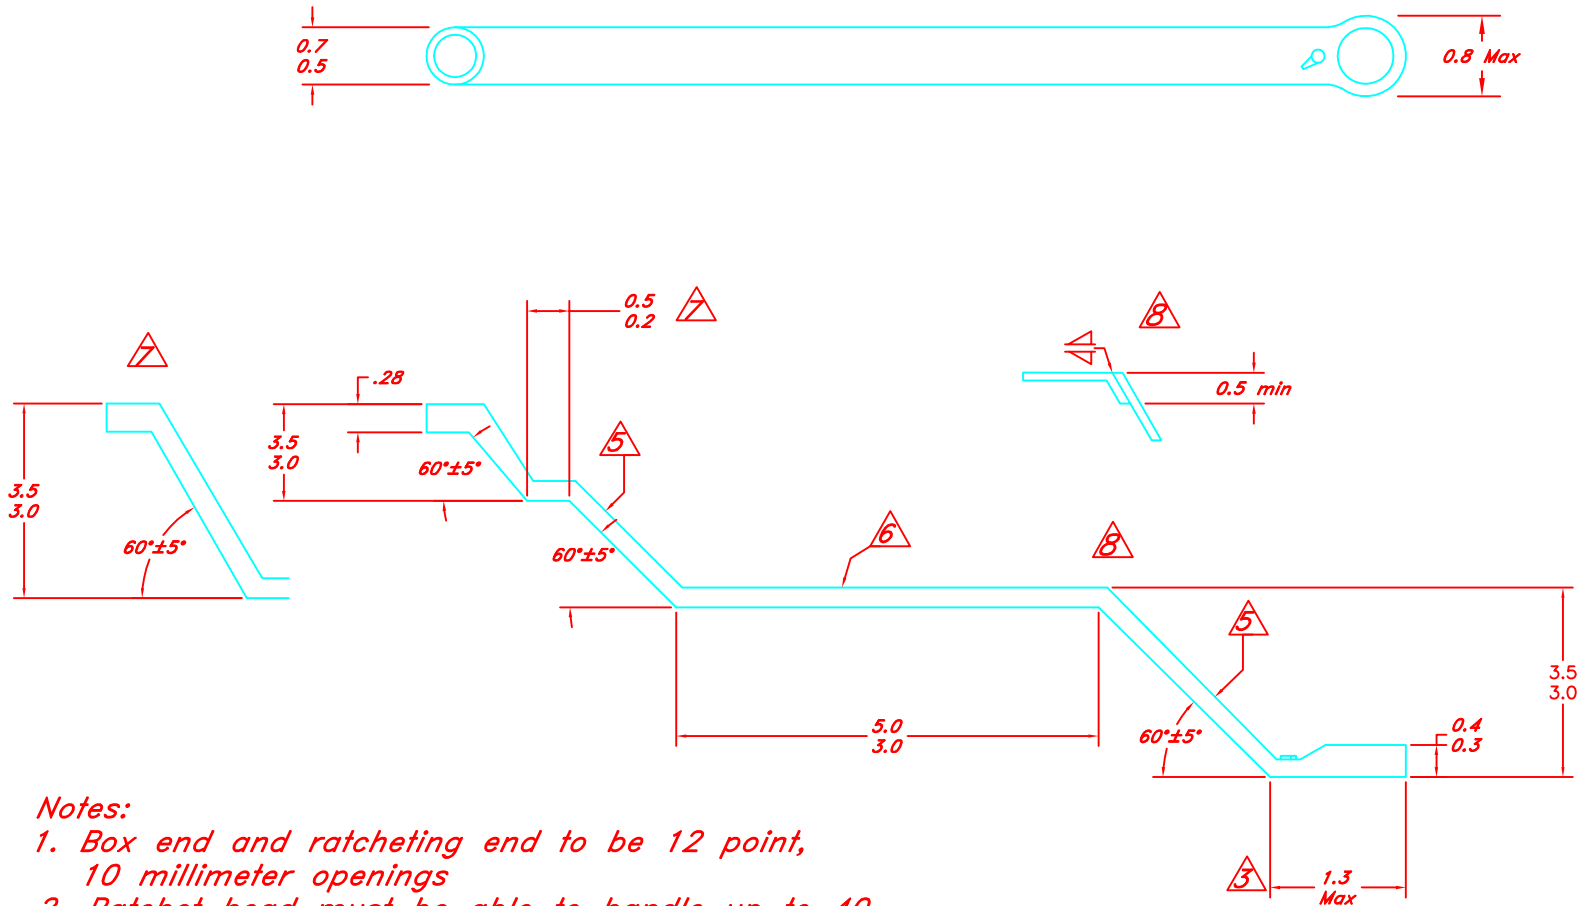

Notes:

1. Box end and ratcheting end to be 12 point, 10 millimeter openings
2. Ratchet head must be able to handle up to 40 ft-lb. of torque without deforming or breaking. Box end wrench must be able to handle 50 ft-lb. of torque without deforming or breaking.

3. Locate bend to allow unimpeded motion of ratchet reversing lever.

4. Hard chrome plate 0.005 to 0.010 thick


5. Mark this area with the letters "10mm" at least 1/8 inch tall

6. Mark tool number 49T40554 in this area

7. Optional Configuration

8. Optional Configuration

9. Material: Sears P/N 0942421 and 0944360 or equivalent

 Muncie Power Products, Inc. Manufacturing Division			
TITLE PTO Installation Wrench			
DRAWN BY:	DATE: 5/3/06	CASTING NO.	
CHKD BY:	DATE:	APPR. BY:	DATE:
UNLESS OTHERWISE SPECIFIED SURFACE FINISH 125/			
WEIGHT SCALE FULL HEAT TREATMENT			
MATERIAL 9			
PART NUMBER REV. C 49T40554 00			

SYM	REVISION	DATE	BY